


PERMCO

WINCH MOTORS

ROLLER BEARING SERIES WINCH MOTORS 3100/5100/7600

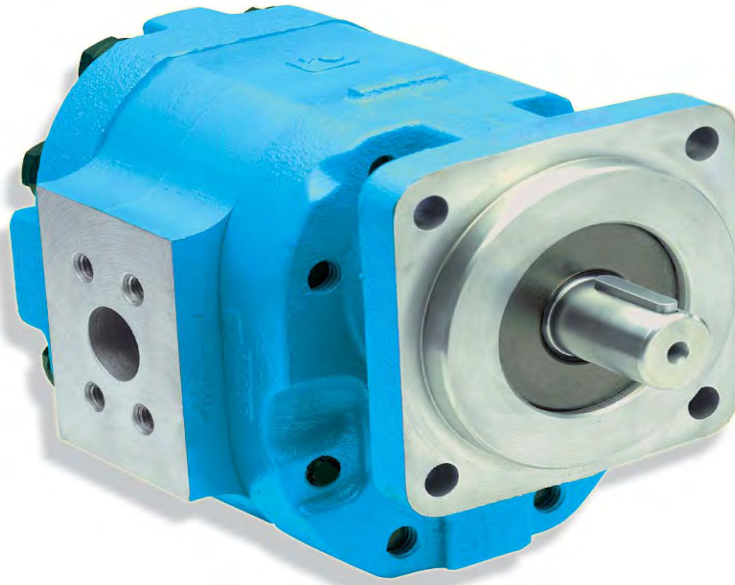

W7600 SERIES SINGLE UNIT

WINCH MOTOR FEATURES

- ❑ Heavy duty roller bearing design
- ❑ Special high tooth gear set to maximize starting torque
- ❑ Start-up torque values up to 452 N-m for single units and 904 N-m for tandem units
- ❑ Special designed ring seals and pressure balanced wear plates maintain high motor efficiency throughout all operating ranges
- ❑ Displacements from 32.8 through 198 ml/m
- ❑ Working pressure up to 18 MPa
- ❑ Speeds from 100 to 2400 RPM
- ❑ Available in both single and tandem units
- ❑ A wide range of porting, mounting and shaft options available
- ❑ Doweled and high strength cast iron construction
- ❑ 100% factory tested




W5100 SERIES TANDEM UNIT



The Sensible Choice

Dimensional Data (mm)

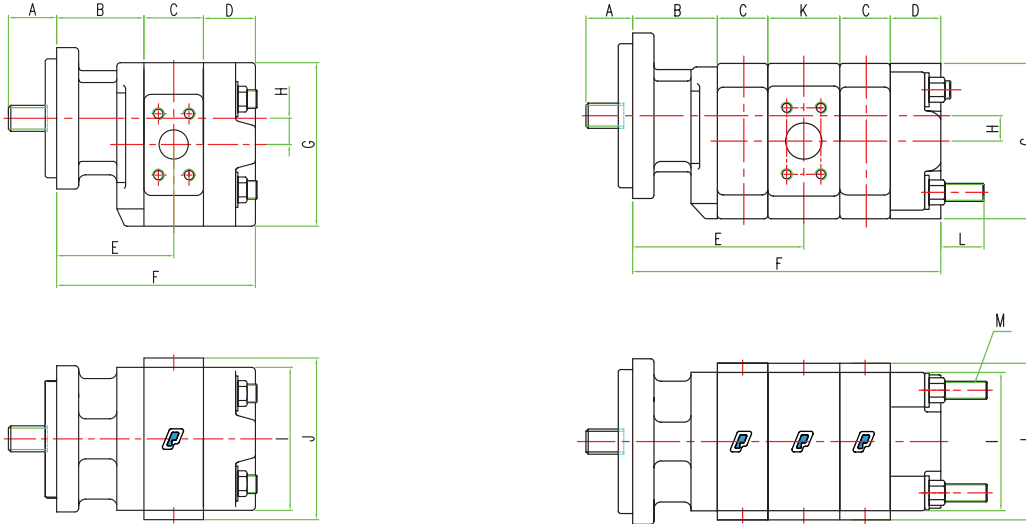

Single Unit

Model		A	B	C	D	E	F	G	H	I	J
W3000/3100	See Drive Shaft	74.67	19.1 + GW	44.45	84.0 + 1/2 GW	138.2 + GW	140.00	22.40	122.17	See Gear Housing	
W5000/5100	Codes in Engineers Handbook	85.85	19.1 + GW	44.45	95.3 + 1/2 GW	149.4 + GW	159.00	25.40	128.52	Codes in Engineers Handbook	
W7500/7600	Handbook	95.25	25.4 + GW	50.80	108 + 1/2 GW	171.5 + GW	203.00	31.80	155.70	Handbook	

GW = GEAR WIDTH




Tandem Unit

Model		A	B	C	D	E	F	G	H	I	J	K	L	M
W3000/3100	See Drive Shaft	74.67	19.1 + GW	44.45	125.5 + GW(F)	220.7 + TGW	140.00	22.40	122.17	See Gear Housing		63.50	38.10	5/8-11UNC-2A
W5000/5100	Codes in Engineers Handbook	85.85	19.1 + GW	44.45	141.5 + GW(F)	241.3 + TGW	159.00	25.40	128.52	Codes in Engineers Handbook		73.15	38.10	5/8-11UNC-2A
W7500/7600	Handbook	95.25	25.4 + GW	50.80	158.8 + GW(F)	273.0 + TGW	203.00	31.80	155.70	Handbook		76.20	38.10	5/8-11UNC-2A

GW = GEAR WIDTH

GW(F) = GEAR WIDTH (FRONT SECTION)

TGW = TOTAL GEAR WIDTH (FRONT AND REAR GEAR SECTIONS)

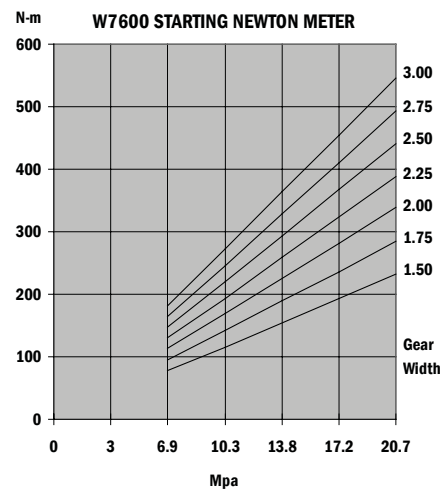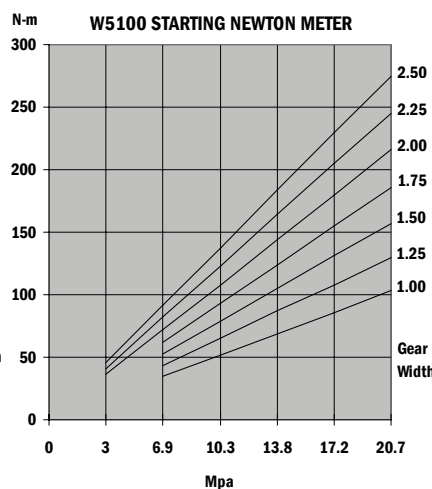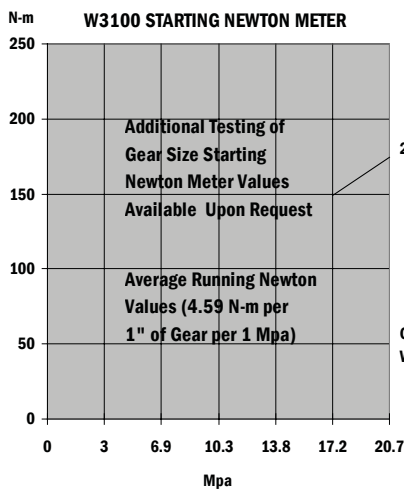

In accordance with our policy of continued product development, we reserve the right to change specifications without notice. The data is average test data and should not be misconstrued to represent performance of each unit.

Permco US
 1500 Frost Road
 P. O. Box 2068
 Streetsboro, OH 44241

Phone 330-626-2801
 Fax 330-626-2805
 e-mail info@permco.com
 www.permco.com

Permco Hydraulik AG
 P. O. Box 553
 6343 Rotkreuz
 Switzerland
 e-mail heinzm@permco.com

Permco (Tianjin) Hydraulics Inc., Ltd.
 236 Jinbindadao Free Trade Zone
 TianJin Port, China
 e-mail technic@permcotj.com
 www.permcotj.com