

DIRECT ACTING OR INTERNAL PILOT OPERATED

Precision-Engineered Fluid Power Products

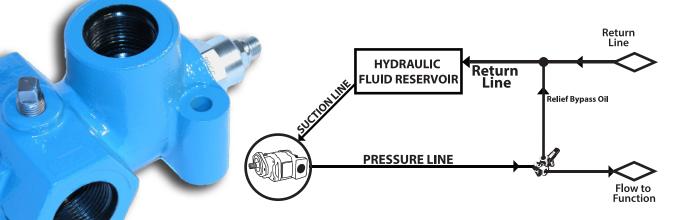

Features

- Same mounting footprint as competitor models
- Available in NPT or SAE/ORB porting
- Available with adjustable direct acting or internal pilot operated relief
- Comes standard with gauge port for accurate relief setting

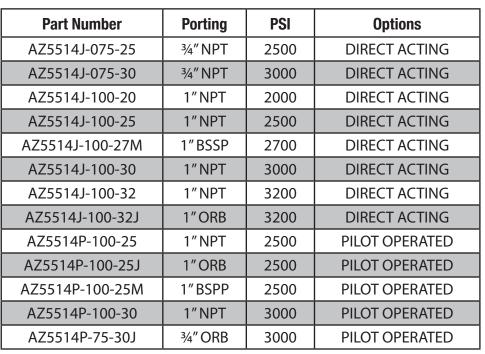

Direct acting - Rapid response, contamination tolerant & low leakage. Nominal flow range from 0 - 46 GPM

Pilot operated - Internally piloted, opens fully as setting approaches creating less system lag. More accurate through rated flow range. Nominal flow range from 0- 50 GPM



Permco USA | 1500 Frost Road | P. O. Box 2068 | Streetsboro, Ohio 44241