


DIRECT ACTING OR INTERNAL PILOT OPERATED

# IN-LINE RELIEF VALVE

Precision-Engineered Fluid Power Products

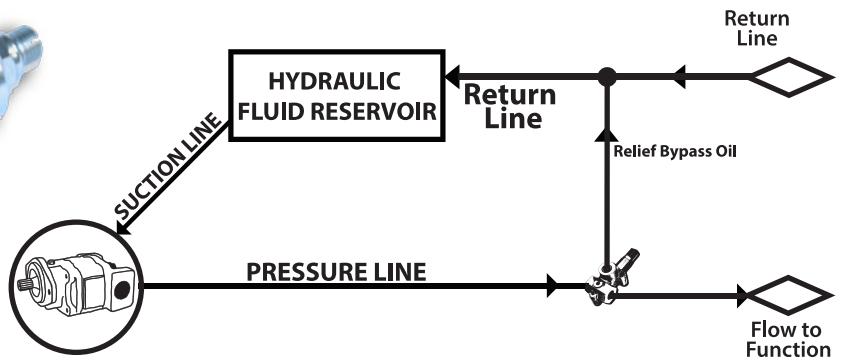

## Features

- Same mounting footprint as competitor models
- Available in NPT or SAE/ORB porting
- Available with adjustable direct acting or internal pilot operated relief
- Comes standard with gauge port for accurate relief setting

Part Number	Porting	PSI	Options
AZ5514J-075-25	3/4" NPT	2500	DIRECT ACTING
AZ5514J-075-30	3/4" NPT	3000	DIRECT ACTING
AZ5514J-100-20	1" NPT	2000	DIRECT ACTING
AZ5514J-100-25	1" NPT	2500	DIRECT ACTING
AZ5514J-100-27M	1" BSSP	2700	DIRECT ACTING
AZ5514J-100-30	1" NPT	3000	DIRECT ACTING
AZ5514J-100-32	1" NPT	3200	DIRECT ACTING
AZ5514J-100-32J	1" ORB	3200	DIRECT ACTING
AZ5514P-100-25	1" NPT	2500	PILOT OPERATED
AZ5514P-100-25J	1" ORB	2500	PILOT OPERATED
AZ5514P-100-25M	1" BSPP	2500	PILOT OPERATED
AZ5514P-100-30	1" NPT	3000	PILOT OPERATED
AZ5514P-100-30J	3/4" ORB	3000	PILOT OPERATED

*Direct acting - Rapid response, contamination tolerant & low leakage. Nominal flow range from 0 - 46 GPM*

*Pilot operated - Internally piloted, opens fully as setting approaches creating less system lag. More accurate through rated flow range. Nominal flow range from 0- 50 GPM*

